



# SIGMA-G2T

**FOR TRE-G2T**

SIGMA-G2T is a powerful receiver for high accuracy applications, such as reference stations and CORS. 216 channels of multi-frequency GPS, and Galileo in a small attractive, sturdy, and watertight box, which contains TRE-G2T board.

SIGMA-G2T is a powerful and reliable receiver for high-precision navigation systems, including high dynamics systems, for machine and traffic control, as well as for high-precision surveying and geodynamics and aerogeophysics applications.

SIGMA can operate as a receiver for post-processing, as a Continuously Operating Reference Station (CORS) or portable base station for Real-time Kinematic (RTK) applications, and as a scientific station collecting information for special studies, such as ionosphere monitoring and the like.

Two external power inputs secure the power system redundancy and eliminate system failure. The on-board power supply on SIGMA receiver accepts any voltage from +10 to +30 volts and delivers clean filtered voltage where needed.


# SIGMA-G2T

## Standard Configuration

- GPS L1/L2/L2C/L5
- Update rate 1 Hz
- RAIM
- TriPad interface
- RS232 serial port (460.8 kbps)
- External GNSS Antenna TNC Female connector
- Rechargeable Li-Ion Batteries

## Optional Features

- Galileo E1/E5A/E5B
- QZSS
- Compass B1/B2\*
- Update rate 5Hz, 10Hz, 20Hz, 50Hz & 100Hz
- RTK rate 1 Hz, 5Hz, 10Hz, 20Hz, 50Hz & 100Hz
- Data recording up to 2048MB
- Multi-Base Code Differential Rover
- Code Differential Base
- Advanced Multipath Reduction
- Two event markers
- Two 1 PPS timing strobes
- 1 PPS level converter
- CAN port
- External Reference Frequency Input/Output
- External Reference Output Frequency converter
- Up to 3 high-speed RS232 serial ports
- High-speed RS232/RS422 serial port
- USB port
- Ethernet
- Bluetooth® Interface
- Internal 3.5G UMTS/HSPA Module
- Internal UHF/VHF Modem
- Internal GSM/GPRS/EDGE Module
- Internal CDMA2000 Module
- External UHF/VHF, GSM/CDMA2000, Bluetooth Antenna Connectors
- WAAS/EGNOS/MSAS (SBAS)
- Two External Power Inputs
- Mounting Bracket

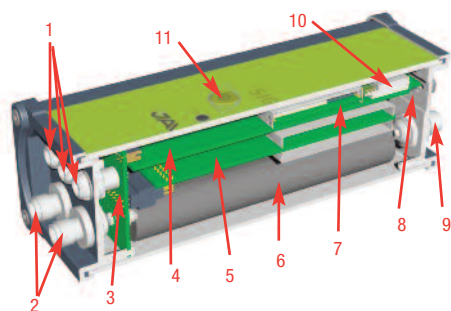

1. Communication and Power Ports
2. External GNSS Antenna Connectors
3. GNSS Interconnect Board
4. GNSS Power and Communication Board with on-board SIM/UIM -card
5. GNSS Receiver with on-board Memory
6. Rechargeable Li-Ion Battery Pack
7. UHF/VHF Modem
8. SIM/UIM Card Holder
9. External UHF/VHF, GSM/CDMA2000, Bluetooth Antenna Connectors
10. 3.5G/GSM/CDMA2000 Modem
11. On/Off Button

\* Board TRE\_G2TH\_4 or newer

Specifications are subject to change without notice.

## Description

Total 216 channels: all-in-view (GPS L1/L2/L5, Galileo E1/E5A/E5B, QZSS L1/L2/L5, Beidou B1/B2, SBAS L1/L5) integrated receiver, rugged aluminum housing with TriPad interface and rechargeable Li-Ion battery pack

## Tracking Specification

Signals Tracked  
GPS C/A, P1, P2, L2C (L+M), L5 (I+Q)  
Galileo E1 (B+C), E5A (I+Q)  
QZSS C/A, L1C (I+Q), L2C (L+M), L5 (I+Q), SAIF  
Beidou B1, B2  
SBAS L1, L5

## Performance Specifications

Autonomous <2 m  
Static, Fast Static accuracy  
Horizontal: 0.3 cm + 0.1 ppm \* base\_line\_length\*\*  
Vertical: 0.35 cm + 0.4 ppm \* base\_line\_length\*\*  
Kinematic accuracy  
Horizontal: 1 cm + 1 ppm \* base\_line\_length  
Vertical: 1.5 cm + 1.5 ppm \* base\_line\_length  
RTK (OTF) accuracy  
Horizontal: 1 cm + 1 ppm \* base\_line\_length  
Vertical: 1.5 cm + 1.5 ppm \* base\_line\_length  
DGPS accuracy < 0.25 m post processing, < 0.5 m real time  
Real-time heading accuracy ~ 0.004/L [rad] RMS, where L is the antenna separation in [m]  
Cold Start <35 seconds  
Warm Start <5 seconds  
Reacquisition <1 second

## Power Specifications

Battery Two internal Li-Ion batteries (7.4V, 5.8 Ah each) with internal charger  
Operating Time Up to 18 hours  
External Power Input Two (primary and secondary)  
Input Voltage +10 to +30 volts

## Radio Specifications

3.5G UMTS/HSPA Module Global (850/1900/2100) /North America (850/1900/1700-2100AWS) / Europe (900/2100)  
GSM/GPRS/EDGE Module Internal GSM/GPRS/EDGE quad-band module, GPRS/EDGE Class 10  
CDMA 2000 Module Internal CDMA2000 dual band module 800/1900MHz  
UHF Radio Modem Internal 360-470 MHz radio transceiver, up to 38.4 kbps  
VHF Radio Modem Internal 138-174 MHz radio transceiver, up to 38.4 kbps  
Base Power Output 1 Watt

## I/O

GNSS Antenna Connector 50 Ohm TNC, +5 VDC (100 mA) to power LNA.  
Three serial RS232 ports (up to 460.8 kbps)  
High-speed RS232/RS422 serial port (up to 460.8 Kbps)  
High-speed USB 2.0 device port (480 Mbps)  
Full-duplex 10BASE-T/100BASE-TX Ethernet port  
Bluetooth V1.2 Class 2 supporting SPP Slave Profile  
CAN 2.0  
Two 1 PPS synchronized  
PPS level converter (0 to 4V on 500hm load)  
Two Event Markers  
IRIG  
External Reference Frequency Input/Output  
External Reference Output Frequency Converter (5/10/20MHz, -2dBm to +13dBm, step 1dB)  
Two LEDs, two function keys (TriPad)

## Memory & Recording

Internal Memory Up to 2048MB of on-board non-removable memory for data storage  
Raw Data Recording Up to 100 times per second (100Hz)

## Real Time Data

Input/Output JPS, RTCM SC104 v. 2.x and 3.x, CMR  
Output NMEA 0183 v. 2.x and 3.0, BINEX

## Environmental Specifications

Enclosure Aluminum extrusion, waterproof IP67  
Operating Temperature -40° C to +75° C\*\*\*  
Storage Temperature -45° C to +85° C\*\*\*\*  
Humidity 95%  
Dimensions W: 132 mm x H: 61 mm x D: 190 mm  
Weight 1270 g

\*\* For good observation conditions and proper length of observation session  
\*\*\* The operating temperature range of Li-Ion batteries is -30 °C to +55°C  
\*\*\*\*The storage temperature of Li-Ion batteries is -20 °C to +45° C



**JAVAD GNSS**  
[www.javad.com](http://www.javad.com)

Rev.2.6 July 9, 2013