



# **How to update an Internal Modem Firmware via NetView & Modem**

**Version 1.0**

**Last Revised April 26, 2017**

**All contents in this manual are copyrighted by JAVAD GNSS.  
All rights reserved. The information contained herein may not be used, accessed, copied,  
stored, displayed, sold, modified, published, or distributed, or otherwise reproduced without express  
written consent from JAVAD GNSS.**

© JAVAD GNSS Inc., 2017

[www.javad.com](http://www.javad.com)

# How to update an Internal Modem Firmware via NetView & Modem

1. Start the NetView & Modem software.
2. Connect to the receiver via TCP, Serial or USB interface.

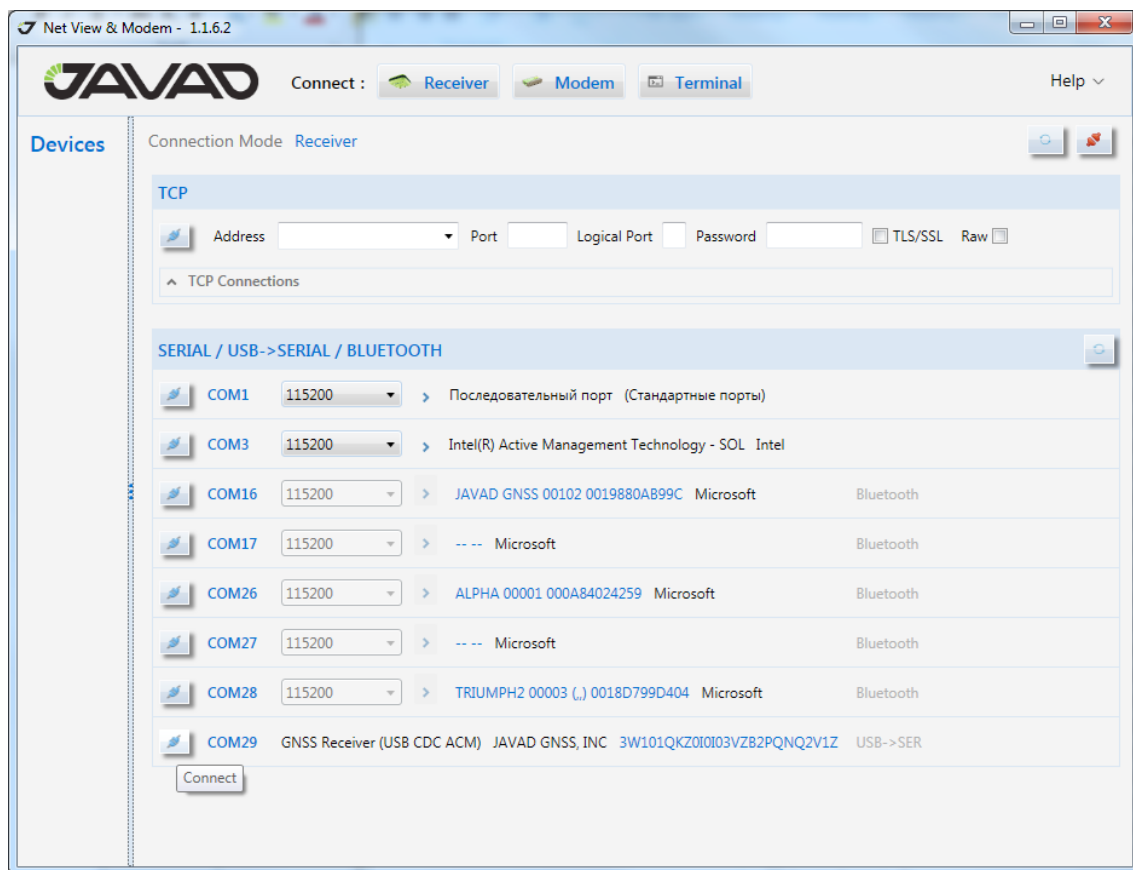


Figure 1. Connection Board

The *Receiver* Window will appear.

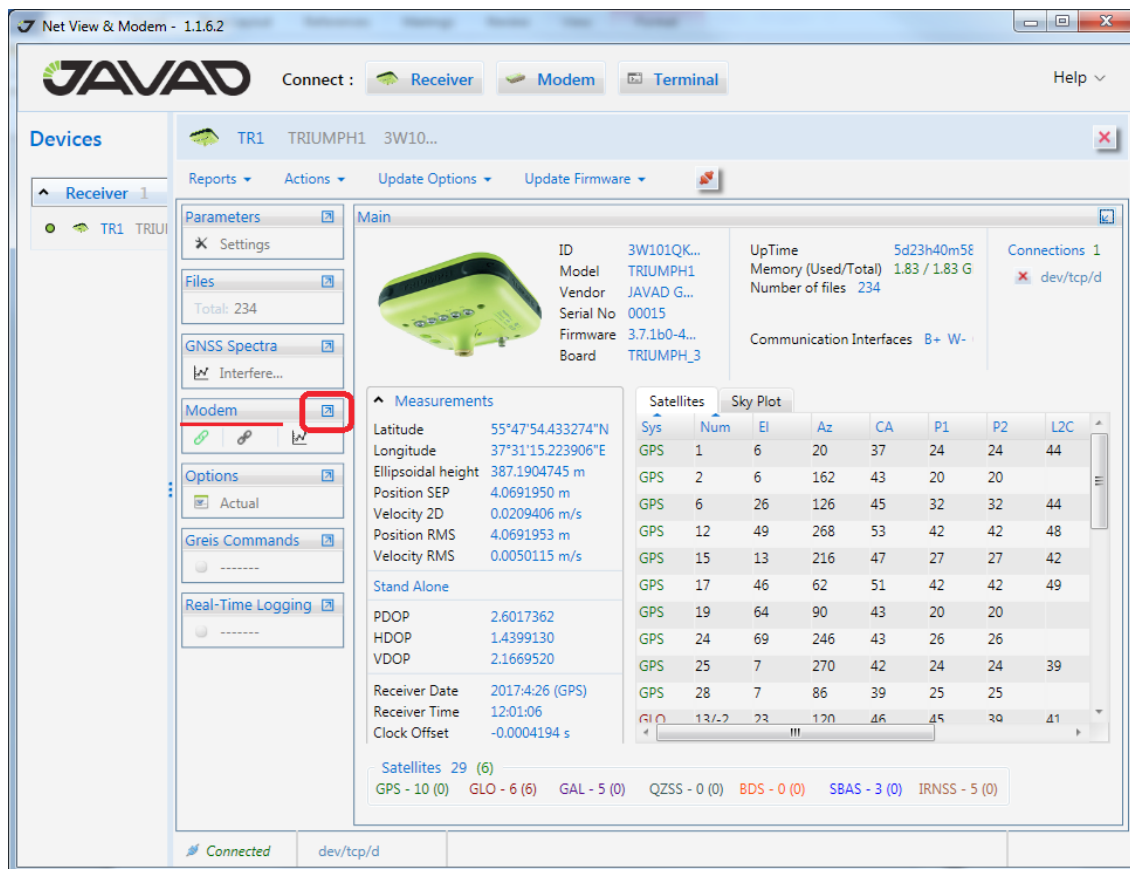


Figure 2. Receiver Window

### 3. Expand the Modem Tile

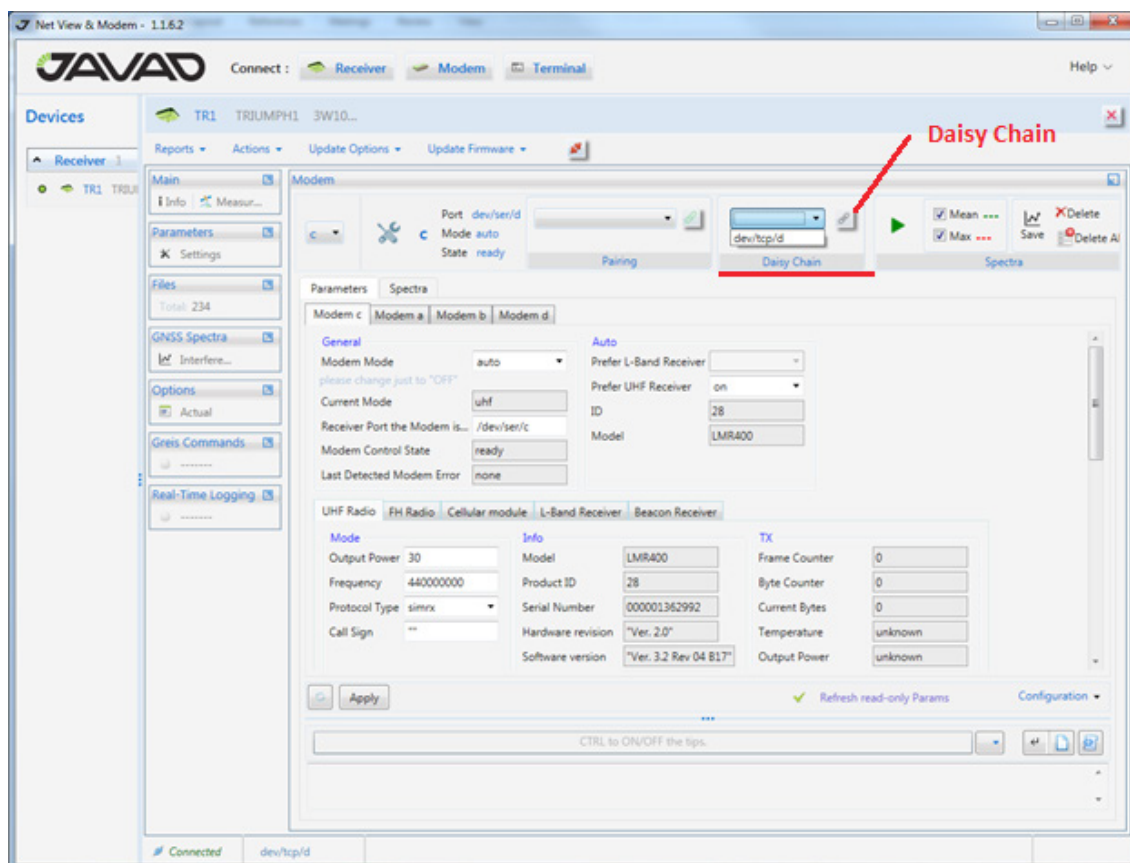


Figure 3. Modem Tile

## 4. Start the Daisy Chain to internal Modem.

Select the channel from the *Daisy Chain* drop-down and click the *Daisy Chain* button.

After connecting full info about the modem will be displayed and the firmware updating will be available.

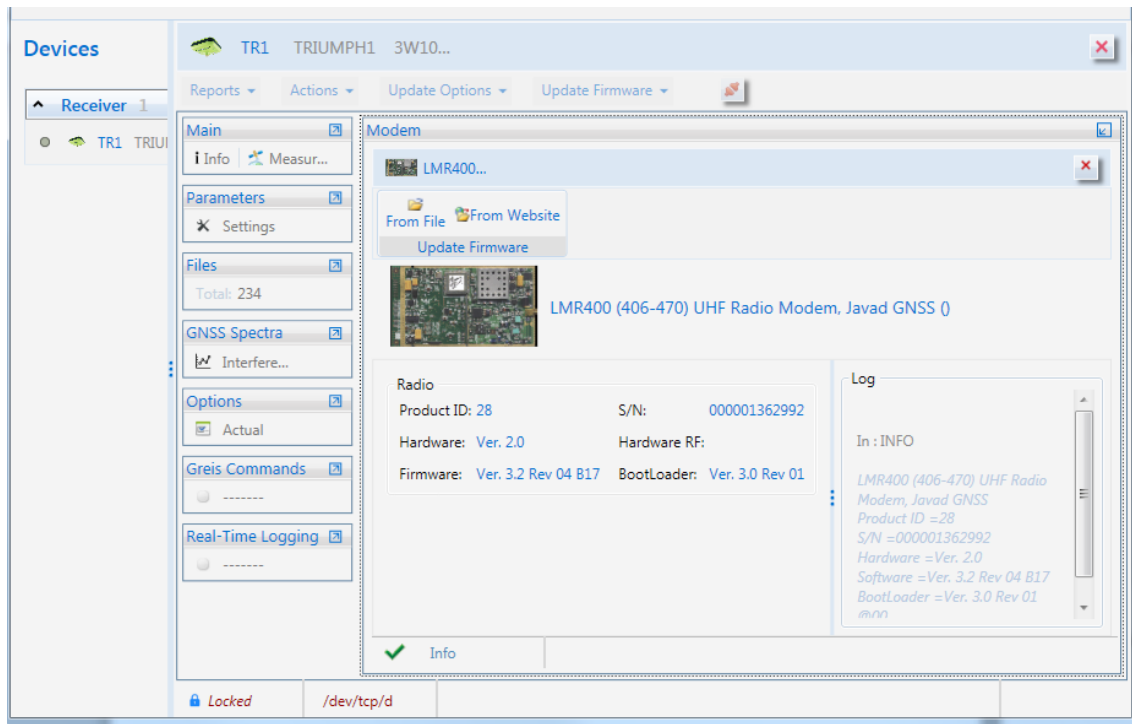


Figure 4. Internal Modem

## 5. Update Internal Modem Firmware

Internal modem firmware can be updated from a file or via the Internet. Depending on the modem model Radio, MCU and Internal MCU firmware can be updating

### Updating from file

Click the *From File* button and choose firmware file using Open File Dialog.

### Updating from Internet

Click the *From Website* button. The firmware file will be downloaded from the site and checked.

If the firmware is suitable to the modem and has the newer version the updating will be started. Otherwise, the warning will be shown.

The status bar at the bottom of the window shows the process progress.

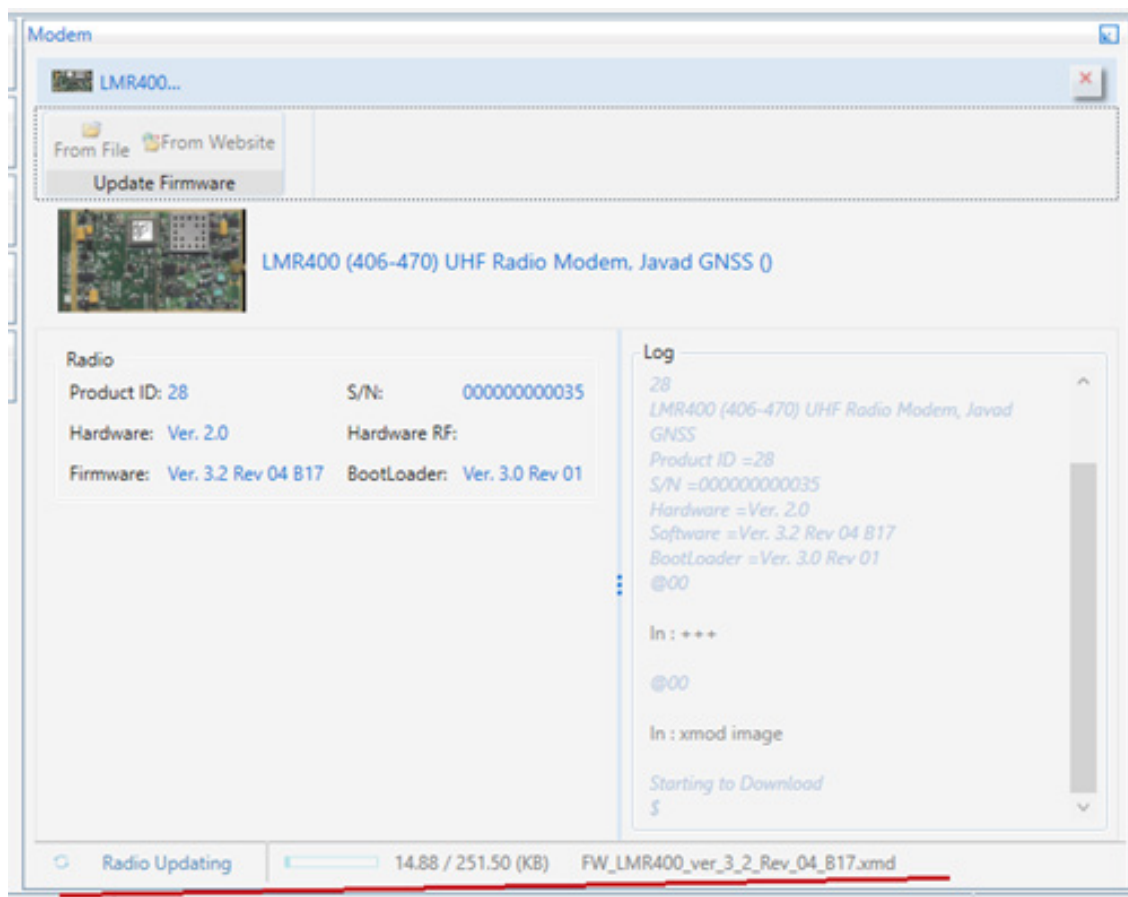


Figure 5. Internal Modem Firmware Updating

After the firmware is updated modem will reconnect and actual information will be displayed.

## 6. Disconnect from internal Modem.

Click the *Close* button. The Daisy chaining will stop and the channel will be released.



900 Rock Avenue, San Jose,  
CA 95131, USA

Phone: +1(408)770-1770  
Fax : +1(408)770-1799

[www.javad.com](http://www.javad.com)

All rights reserved © JAVAD GNSS, Inc., 2017